



10/528553

POT/GB2003/004127



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 17 NOV 2003

WIPO

PCT

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 24 September 2003

The
Patent
Office

THE PATENT OFFICE

L

21 SEP 2002

NEWPORT

225 E750111-10 002806
F01 000 0.00-0221982.2

1/77

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet, from the Patent Office to help you fill in this form)

1.	Your reference	SWS2526		
2.	Patent application number (The Patent Office will fill in this part)	0221982.2		
3.	Full name, address and postcode of the or of each applicant (<u>underline all surnames</u>)	pbi Home & Garden Limited Durkan House 214-224 High Street Waltham Cross Hertfordshire, EN8 7DP. Patents ADP number (if you know it) 8469405001 If the applicant is a corporate body, give the country/state of its incorporation Great Britain		
4.	Title of the invention	Granule Distributing Apparatus		
5.	Name of your agent (if you have one)	Barker Brettell		
	"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	138 Hagley Road Edgbaston Birmingham B16 9PW Patents ADP number (if you know it) 7442494002		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of Filing (day/month/year)
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (day/month/year)
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))			
	Yes			

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document
- Continuation sheets of this form

Description 5 + 5

Claim(s)

Abstract

Doc

Drawing(s) 7 + 7

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination
(*Patents Form 9/77*)

Request for substantive examination
(*Patents Form 10/77*)

Any other documents
(*please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature

Barker Brettell

Barker Brettell

Date

20.09.02

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr. S.W. Stonehouse

Tel: 0121 456 1364

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- 1) If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505
- 2) Write your answers in capital letters using black ink or you may type them.
- 3) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- 4) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- 5) Once you have filled in the form you must remember to sign and date it.
- 6) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

GRANULE DISTRIBUTING APPARATUS

This invention relates to granule distributing apparatus.

Such apparatus is useful, amongst other purposes, for distributing granular product such as a combined lawn fertiliser and broadleaf herbicide.

- 5 Various kinds of apparatus are available for the distribution of granular products, for example that described in European Patent Application No. EP A 0 903 300. In that application is described a container having a threaded discharge opening into which is screwed a ring member which retains a telescopic duct member having a spreader configuration at its
- 10 end. The ring member may be loosened so that the telescopic duct member can be rotated between a storage position where it may extend in a collapsed condition across the top of the container and a working position in which it is telescopically extended and projects away from the top of the container. A detachable cap is provided to cover the duct
- 15 member in that the storage condition.

- We have found that there are several problems inherent in this design. Since the cap member is separate, we have found that it can become lost. Further, in use the apparatus is swung from side to side in order to distribute the granules, and this can impose a torque on the spreading duct
- 20 which can in turn lead to a loosening of the ring member so that the duct falls off and the granules are spilled.

It is an object of the present invention to provide granule distributing apparatus in which these disadvantages are alleviated.

According to the present invention there is provided granule distributing apparatus which comprises a container having a discharge opening for a product to be distributed and a duct member connected to the discharge opening and providing a distribution channel for the product, wherein the duct member is foldable between a working position in which it projects away from the container and allows passage of product through the discharge opening and along the distribution channel, and a storage position in which the duct member obturates the discharge opening and extends over the top of the container.

- 10 Preferably a locking member is provided which is manipulatable to locate the duct member in the working position and prevent relative releasing movement between the duct connector and container. The locking member may also serve to close an entry end of the distribution channel when the duct member is in the storage position.
- 15 Ruffle means may be provided at a discharge end of the distribution channel to urge the granular product to scatter as it is discharged from the channel.

A preferred embodiment of the invention will now be described, by way of example only, and with reference to the accompanying diagrammatic drawings, in which:

Figure 1 is a cross-sectional view of a granule distributing apparatus in a storage configuration;

Figure 2 is a cross-sectional view of the granule distributing apparatus in a working configuration;

- 25 Figure 3 is a further cross-sectional view of the granule distributing apparatus in an intermediate configuration;

Figure 4 is a plan view of the apparatus;

Figure 5 is an enlarged perspective view of a duct member;

Figure 6 is an enlarged perspective view of a duct connector; and

Figure 7 is an enlarged perspective view of a locking member.

- 5 In the drawings, a container generally indicated at 1 has a hollow handle portion 2 and a discharge opening 3 by way of which the container is also charged. The duct connector 4 is attached over the discharge opening 3 and in turn carries a front locking member 5 and a duct member 6.

10 The duct connector 4 attaches to the container 1 over the discharge opening 3 by a twist locking mechanism rather than a screw thread. We have found that in practice, this permits the discharge opening 3 to be made larger, and this is an aid to filling.

15 The front locking member 5 is attached to the duct connector 4 by a pair of co-axial studs 51 (Figure 7) mounted on legs 52 carried at the sides of the locking member 5. These studs engage as a snap fit into stirrup mountings 41 (Figure 6) on the duct connector 4. The locking member 5 is able to be manipulated angularly about the axis of the studs 51 and also carries a locking stirrup 53 which is pivotable by the angular movement of the locking member into engagement with a co-operating locking boss 11
20 (Figures 1 to 3) formed on the container 1. This prevents relative rotation between the container 1 and the duct connector 4 when the duct member is in the working configuration, with the result that the duct connector cannot work loose.

25 The duct member 6 is pivotally attached to the connector 4 by a pair of studs 61, Figure 5, carried by wings 62, which snap fit into bearings 42,

Figure 6, in the connector 4. The duct member 6 is thus able to fold between the working configuration shown in Figure 2 in which it extends away from the container over the locking member and the storage configuration shown in Figure 1 in which it extends over and substantially parallel to the top of the container.

The duct connector 4 includes an opening 43, Figure 6, in communication with the discharge opening 3 of the container 1. The duct connector opening 43 is surrounded by an upstanding rectangularly extending wall 44 having opposed sides with arcuate tops 45 which are concentric with the pivot axis of the bearings 42. The duct member 6 is configured so that its inner end rides against the top of that wall 44 to enable an open entry end 63 of a tubular distribution channel 64 of the duct member to be brought into communication with the opening 43, and thus the discharge opening 3 of the container 1, when the duct member is in the working configuration in order to distribute the contents of the container. Also, a portion 65 of the wall of the channel 64 is arranged to close off the top of the wall 44 when the duct member is in the storage configuration.

The tubular distribution channel 64 of the duct member has a central baffle 66 at its opposite discharge end 67 so that granular material being discharged is urged to scatter.

Curved side walls 68, formed integrally with the duct member parallel to and spaced from opposite longitudinal sides of the distribution channel 64, spread arcuately away from the distribution channel and are strengthened by stiffening fins 69, Figure 5, at their inside concave surfaces 70. Outer free edges 71 of the side walls 68 seat on top of the container, substantially in line with side walls of the container, when the duct member is in the storage position.

The stiffening fins 69 and the general design of the duct member give substantial vertical load strength to the duct member. The duct connector 4 is externally shaped to complement the external shape of the duct member when the latter is in the storage position.


When the duct member is in the storage position the locking member is flipped angularly to release the locking stirrup 53 from the locking boss 11 on the container and close the locking member over the adjacent entry end 63 of the distribution channel 64, as shown in Figure 1.

- 10 When in the storage configuration shown in Figure 1, the locking member 5 and the duct member 6 together with the duct connector 4 serve to form a composite cap covering the top of the container, and they are designed to shed water to prevent the ingress of rain should the container be left out of doors.

15

1/7

Fig. 1

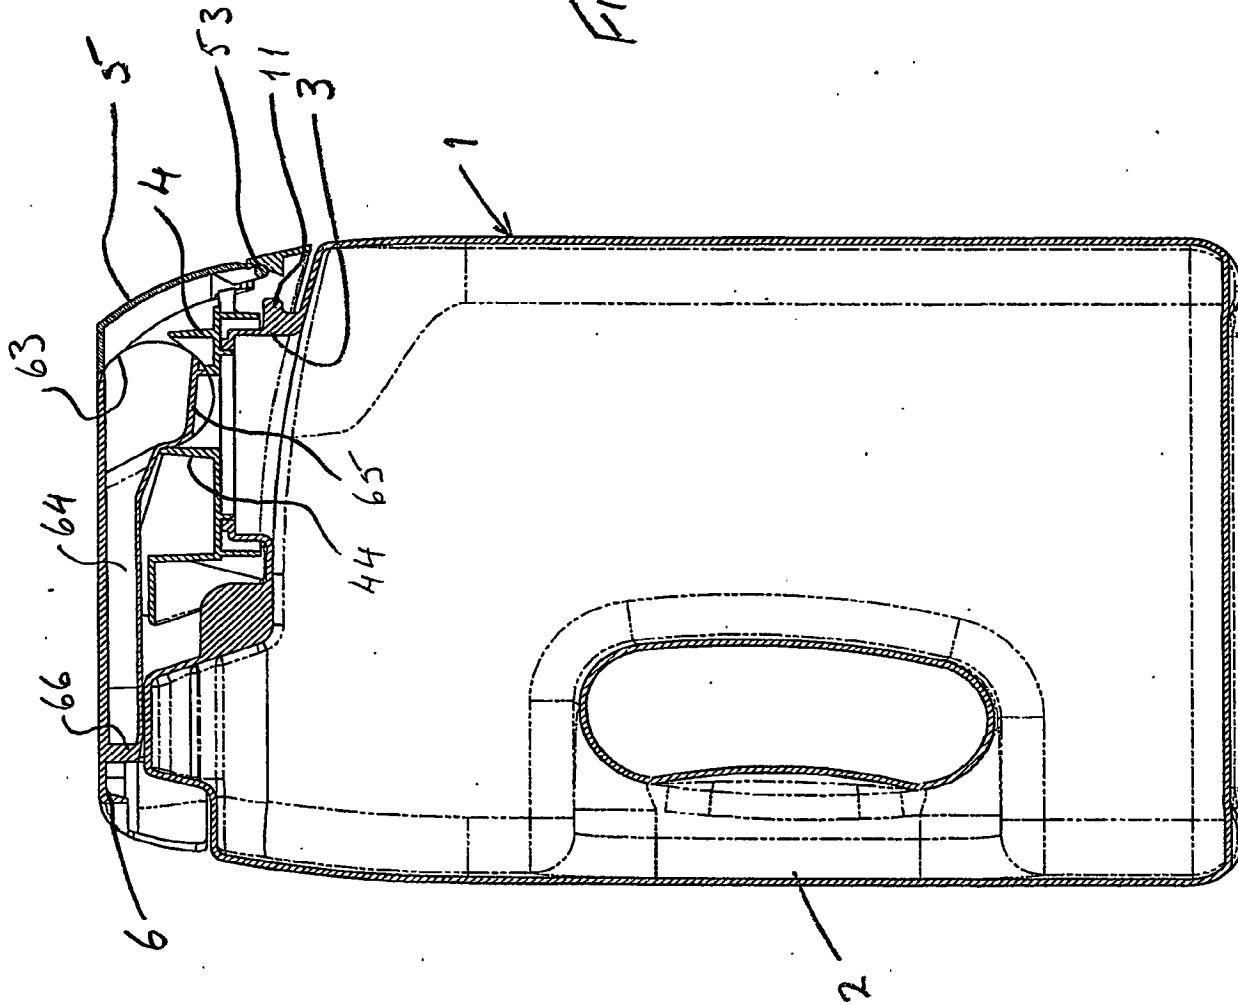


20

Fig. 2



3/7

Fig. 3

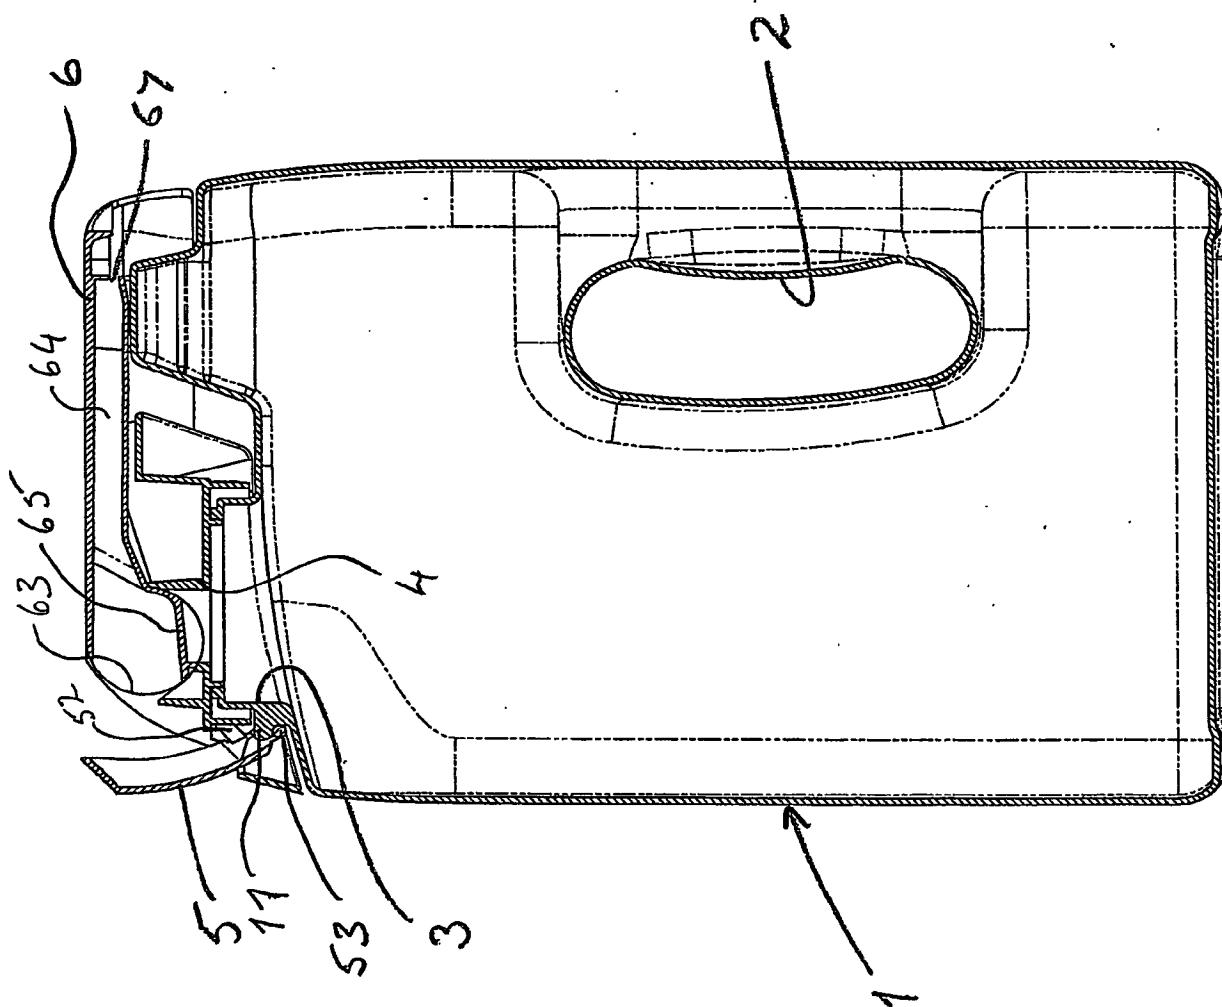

B-1

4/7

Fig 4

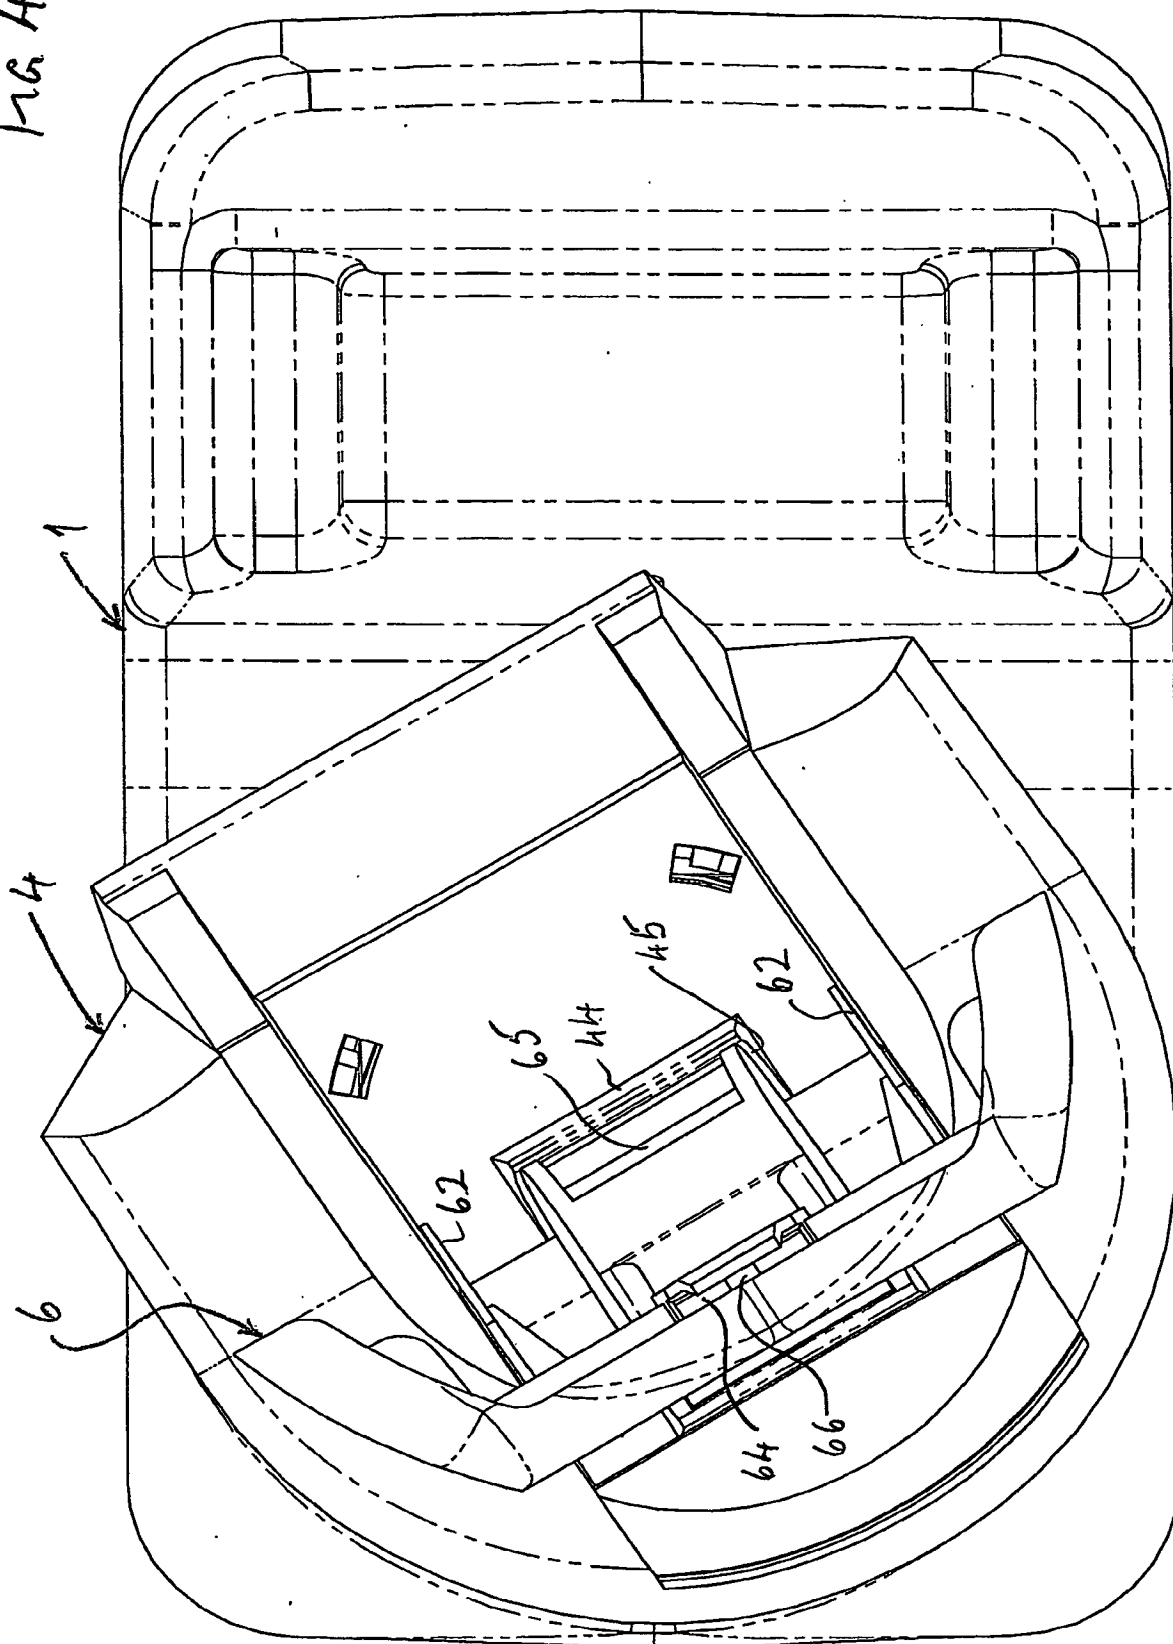




FIG 6


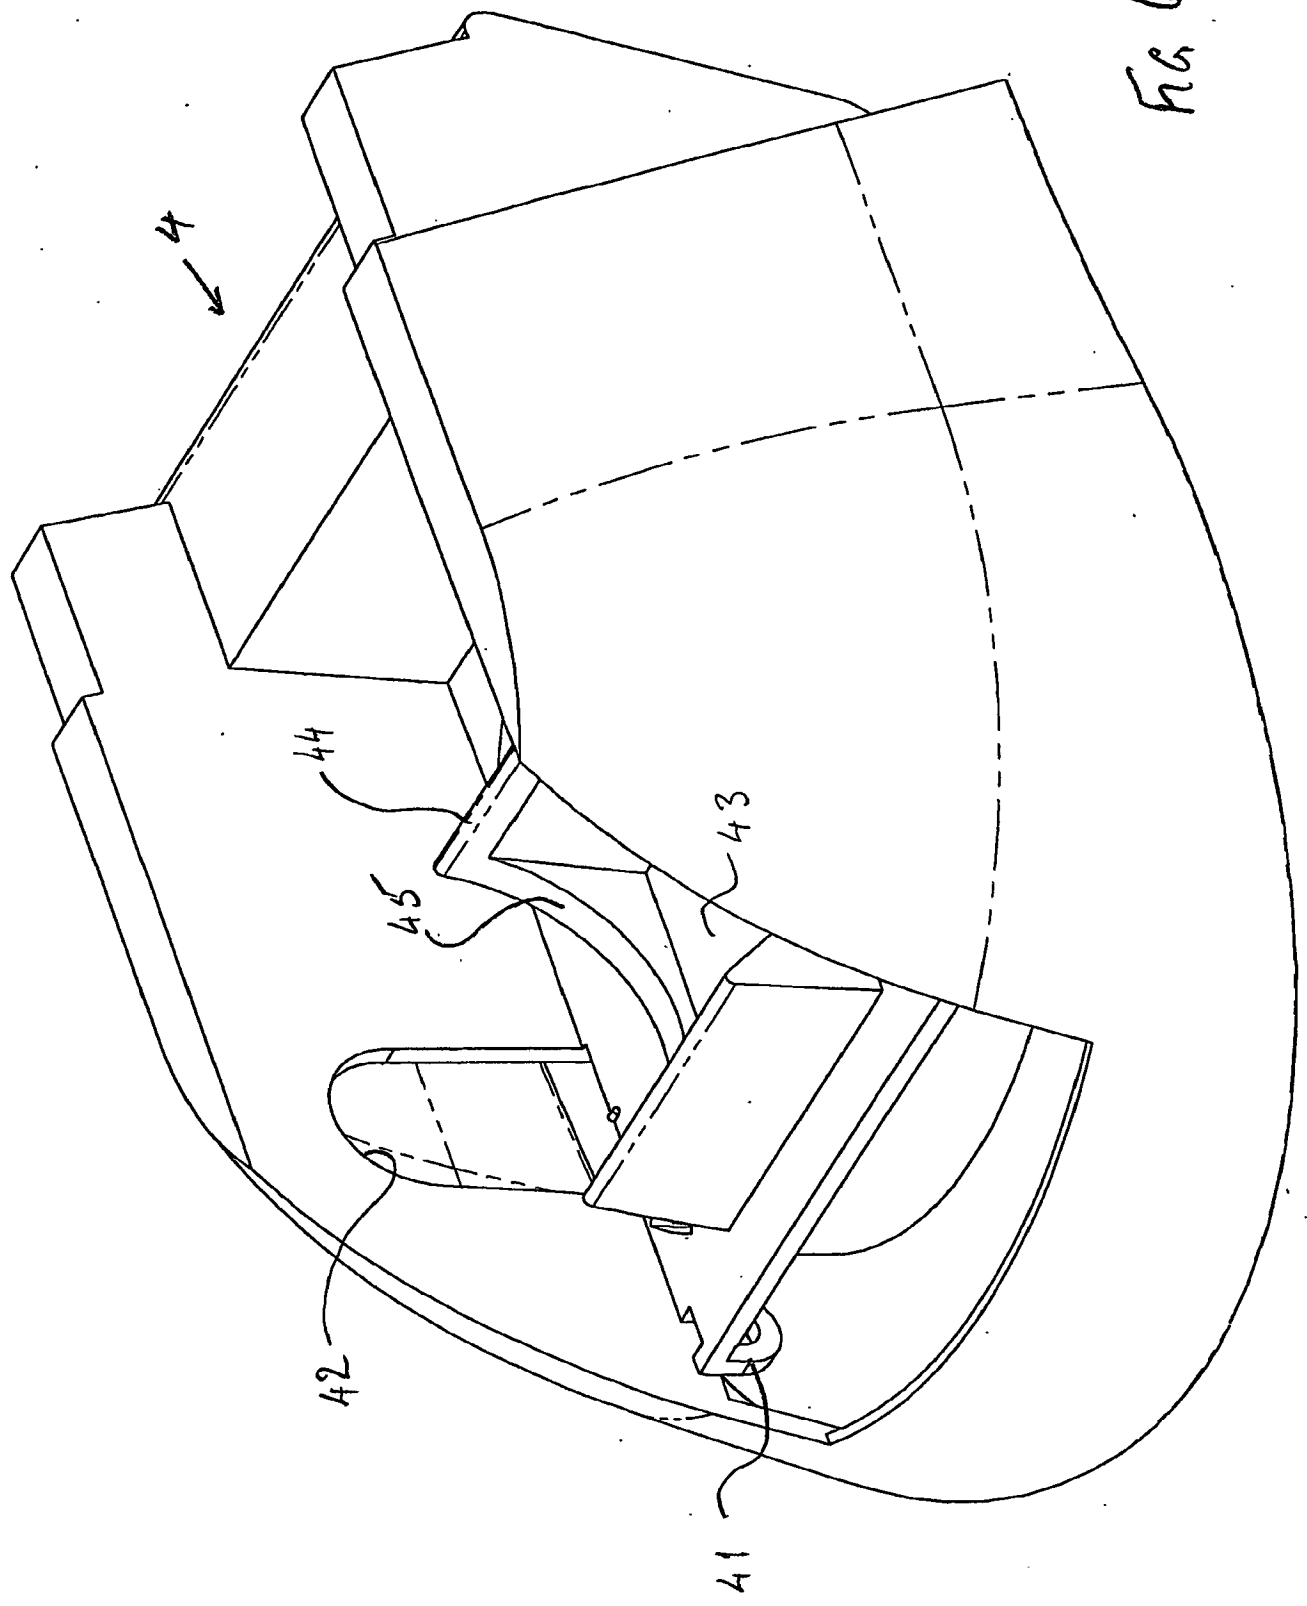


Fig 7



PCT Application
GB0304127

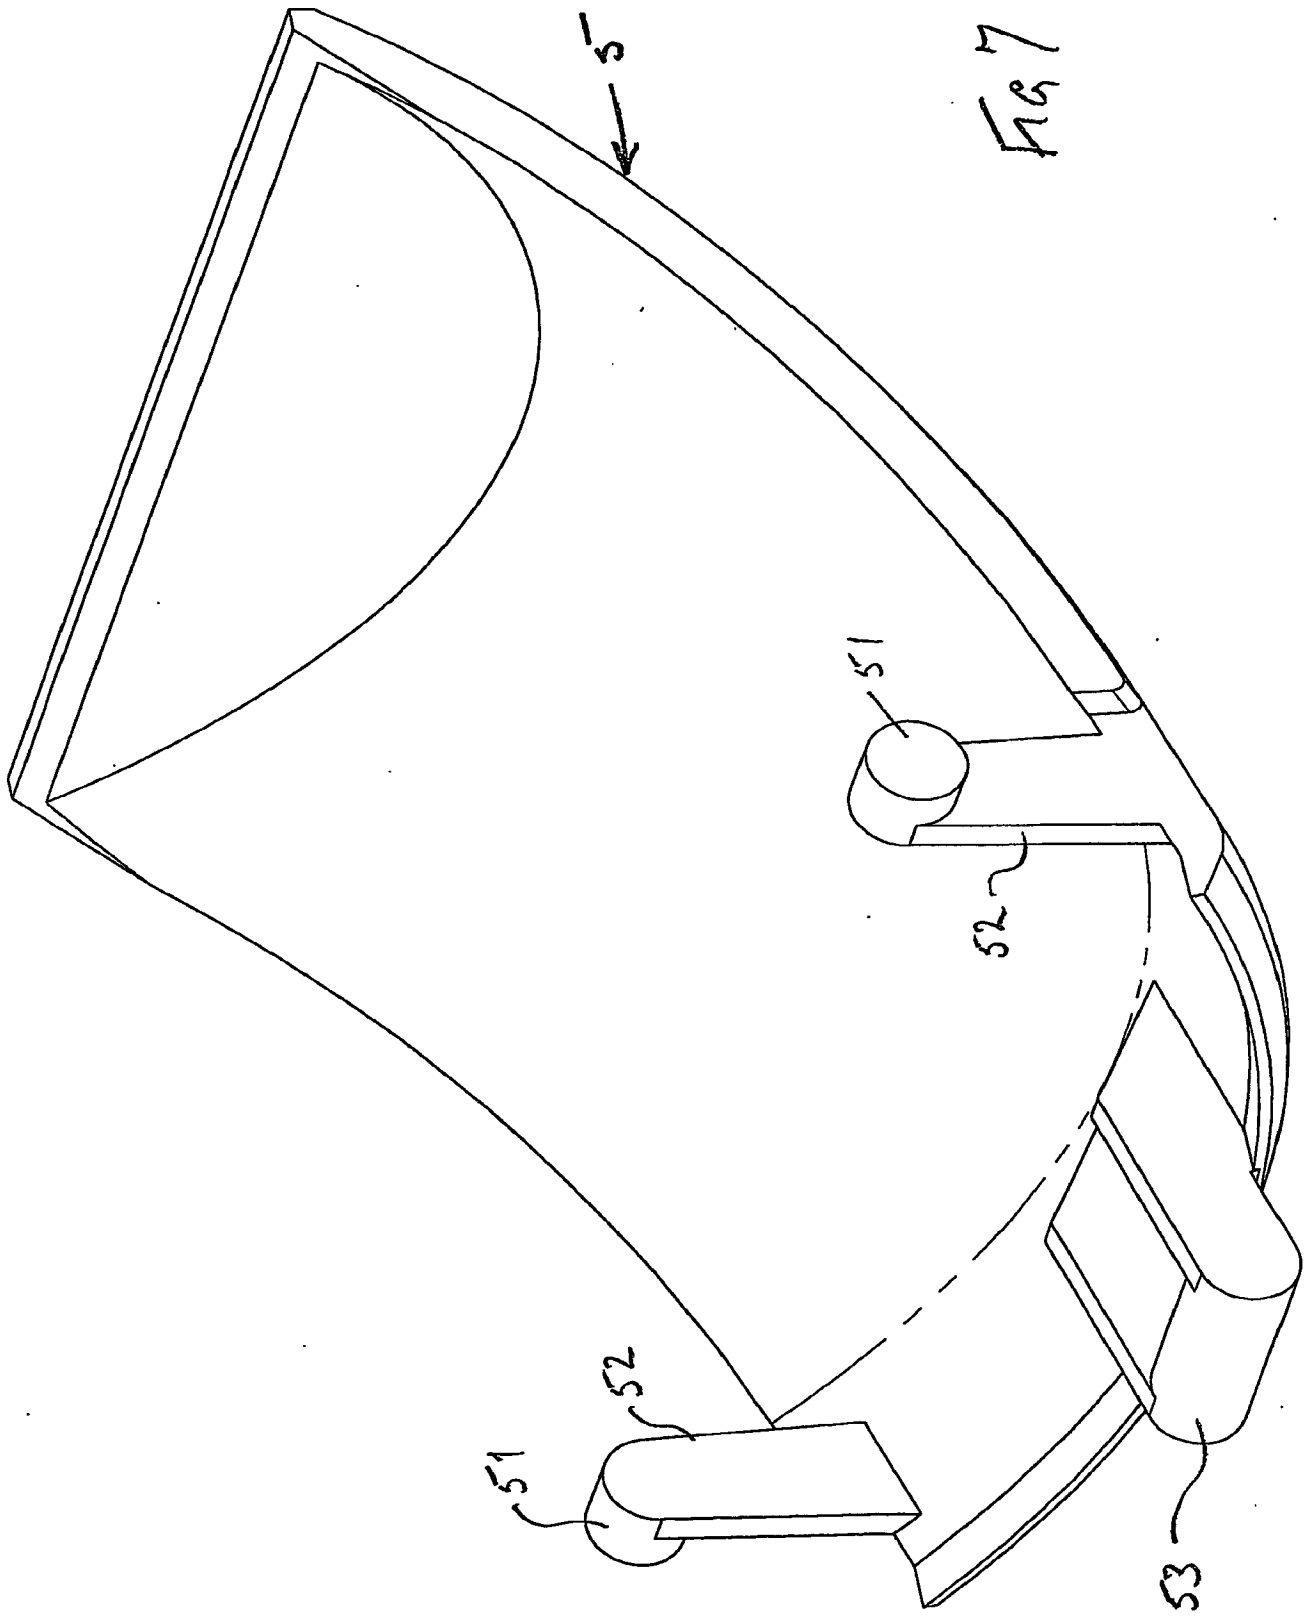